

Architape Pro 50 IP67

Flexible white LED strips



Architape Pro 50 IP67 white flexible waterproof LED strips are the perfect solution for outdoor LED linear decorative, cove lighting, curved applications, edge lighting and more.

These LED strips use the highest quality materials, including Nichia LEDs and a current stabilization system that ensures consistent performance and a long operating life.

The dust and dirt resistant housing is easy to clean and is fully UV resistant. It is also salt and solvent proof, making these tapes a reliable and versatile choice for creative outdoor lighting applications.


Key features

- Waterproof IP67 LED strip
- For outdoor lighting applications
- 56 Nichia LEDs per metre
- 24V DC voltage input
- 3-step MacAdam LEDs or Single Bin LEDs
- Crystal clear housing
- UV, salt & solvent resistant
- Stabilized current design
- Dimmable
- Reverse voltage protection

Applications

- Accent lighting
- Bridge lighting
- Cove lighting
- Facade lighting
- Mirror backlighting

Dimensions

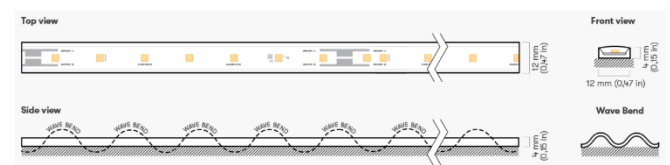

Specifications

Product	Power	Voltage	CRI	CCT	Lumen output	Efficacy	Max run
AP-50-2-N5-820-IP	2.4 W/m	24 V	CRI 80+	2000K	197 Lm/m	82 Lm/W	18.5 m
AP-50-2-N5-822-IP	2.4 W/m	24 V	CRI 80+	2200K	213 Lm/m	89 Lm/W	18.5 m
AP-50-2-N5-825-IP	2.4 W/m	24 V	CRI 80+	2500K	233 Lm/m	97 Lm/W	18.5 m
AP-50-2-N5-827-IP	2.4 W/m	24 V	CRI 80+	2700K	273 Lm/m	114 Lm/W	18.5 m
AP-50-2-N5-830-IP	2.4 W/m	24 V	CRI 80+	3000K	281 Lm/m	117 Lm/W	18.5 m
AP-50-2-N5-835-IP	2.4 W/m	24 V	CRI 80+	3500K	288 Lm/m	120 Lm/W	18.5 m
AP-50-2-N5-840-IP	2.4 W/m	24 V	CRI 80+	4000K	289 Lm/m	120 Lm/W	18.5 m
AP-50-2-N5-850-IP	2.4 W/m	24 V	CRI 80+	5000K	317 Lm/m	132 Lm/W	18.5 m
AP-50-2-N5-857-IP	2.4 W/m	24 V	CRI 80+	5700K	306 Lm/m	128 Lm/W	18.5 m
AP-50-2-N5-865-IP	2.4 W/m	24 V	CRI 80+	6500K	306 Lm/m	128 Lm/W	18.5 m
AP-50-2-N5-920-IP	2.4 W/m	24 V	CRI 90+	2000K	170 Lm/m	71 Lm/W	18.5 m
AP-50-2-N5-922-IP	2.4 W/m	24 V	CRI 90+	2200K	185 Lm/m	77 Lm/W	18.5 m
AP-50-2-N5-925-IP	2.4 W/m	24 V	CRI 90+	2500K	200 Lm/m	83 Lm/W	18.5 m
AP-50-2-N5-927-IP	2.4 W/m	24 V	CRI 90+	2700K	242 Lm/m	101 Lm/W	18.5 m
AP-50-2-N5-930-IP	2.4 W/m	24 V	CRI 90+	3000K	248 Lm/m	103 Lm/W	18.5 m
AP-50-2-N5-935-IP	2.4 W/m	24 V	CRI 90+	3500K	255 Lm/m	106 Lm/W	18.5 m
AP-50-2-N5-940-IP	2.4 W/m	24 V	CRI 90+	4000K	257 Lm/m	107 Lm/W	18.5 m
AP-50-2-N5-950-IP	2.4 W/m	24 V	CRI 90+	5000K	271 Lm/m	113 Lm/W	18.5 m
AP-50-2-N5-957-IP	2.4 W/m	24 V	CRI 90+	5700K	269 Lm/m	112 Lm/W	18.5 m
AP-50-2-N5-965-IP	2.4 W/m	24 V	CRI 90+	6500K	268 Lm/m	112 Lm/W	18.5 m
AP-50-2-N5-027-IP	2.4 W/m	24 V	CRI 95+	2700K	197 Lm/m	82 Lm/W	18.5 m
AP-50-2-N5-030-IP	2.4 W/m	24 V	CRI 95+	3000K	201 Lm/m	84 Lm/W	18.5 m
AP-50-2-N5-035-IP	2.4 W/m	24 V	CRI 95+	3500K	206 Lm/m	86 Lm/W	18.5 m
AP-50-2-N5-040-IP	2.4 W/m	24 V	CRI 95+	4000K	208 Lm/m	87 Lm/W	18.5 m
AP-50-2-N5-050-IP	2.4 W/m	24 V	CRI 95+	5000K	223 Lm/m	93 Lm/W	18.5 m

Specifications

Product	Power	Voltage	CRI	CCT	Lumen output	Efficacy	Max run
AP-50-5-N5-820-IP	4.8 W/m	24 V	CRI 80+	2000K	403 Lm/m	84 Lm/W	13 m
AP-50-5-N5-822-IP	4.8 W/m	24 V	CRI 80+	2200K	436 Lm/m	91 Lm/W	13 m
AP-50-5-N5-825-IP	4.8 W/m	24 V	CRI 80+	2500K	477 Lm/m	99 Lm/W	13 m
AP-50-5-N5-827-IP	4.8 W/m	24 V	CRI 80+	2700K	558 Lm/m	116 Lm/W	13 m
AP-50-5-N5-830-IP	4.8 W/m	24 V	CRI 80+	3000K	574 Lm/m	120 Lm/W	13 m
AP-50-5-N5-835-IP	4.8 W/m	24 V	CRI 80+	3500K	588 Lm/m	123 Lm/W	13 m
AP-50-5-N5-840-IP	4.8 W/m	24 V	CRI 80+	4000K	589 Lm/m	123 Lm/W	13 m
AP-50-5-N5-850-IP	4.8 W/m	24 V	CRI 80+	5000K	628 Lm/m	131 Lm/W	13 m
AP-50-5-N5-857-IP	4.8 W/m	24 V	CRI 80+	5700K	606 Lm/m	126 Lm/W	13 m
AP-50-5-N5-865-IP	4.8 W/m	24 V	CRI 80+	6500K	606 Lm/m	126 Lm/W	13 m
AP-50-5-N5-920-IP	4.8 W/m	24 V	CRI 90+	2000K	338 Lm/m	70 Lm/W	13 m
AP-50-5-N5-922-IP	4.8 W/m	24 V	CRI 90+	2200K	365 Lm/m	76 Lm/W	13 m
AP-50-5-N5-925-IP	4.8 W/m	24 V	CRI 90+	2500K	396 Lm/m	83 Lm/W	13 m
AP-50-5-N5-927-IP	4.8 W/m	24 V	CRI 90+	2700K	482 Lm/m	100 Lm/W	13 m
AP-50-5-N5-930-IP	4.8 W/m	24 V	CRI 90+	3000K	494 Lm/m	103 Lm/W	13 m
AP-50-5-N5-935-IP	4.8 W/m	24 V	CRI 90+	3500K	507 Lm/m	106 Lm/W	13 m
AP-50-5-N5-940-IP	4.8 W/m	24 V	CRI 90+	4000K	512 Lm/m	107 Lm/W	13 m
AP-50-5-N5-950-IP	4.8 W/m	24 V	CRI 90+	5000K	541 Lm/m	113 Lm/W	13 m
AP-50-5-N5-957-IP	4.8 W/m	24 V	CRI 90+	5700K	537 Lm/m	112 Lm/W	13 m
AP-50-5-N5-965-IP	4.8 W/m	24 V	CRI 90+	6500K	534 Lm/m	111 Lm/W	13 m
AP-50-5-N5-027-IP	4.8 W/m	24 V	CRI 95+	2700K	391 Lm/m	81 Lm/W	13 m
AP-50-5-N5-030-IP	4.8 W/m	24 V	CRI 95+	3000K	400 Lm/m	83 Lm/W	13 m
AP-50-5-N5-035-IP	4.8 W/m	24 V	CRI 95+	3500K	408 Lm/m	85 Lm/W	13 m
AP-50-5-N5-040-IP	4.8 W/m	24 V	CRI 95+	4000K	413 Lm/m	86 Lm/W	13 m
AP-50-5-N5-050-IP	4.8 W/m	24 V	CRI 95+	5000K	442 Lm/m	92 Lm/W	13 m

Specifications

Product	Power	Voltage	CRI	CCT	Lumen output	Efficacy	Max run
AP-50-10-N5-820-IP	9.6 W/m	24 V	CRI 80+	2000K	812 Lm/m	85 Lm/W	7.5 m
AP-50-10-N5-822-IP	9.6 W/m	24 V	CRI 80+	2200K	879 Lm/m	92 Lm/W	7.5 m
AP-50-10-N5-825-IP	9.6 W/m	24 V	CRI 80+	2500K	962 Lm/m	100 Lm/W	7.5 m
AP-50-10-N5-827-IP	9.6 W/m	24 V	CRI 80+	2700K	1125 Lm/m	117 Lm/W	7.5 m
AP-50-10-N5-830-IP	9.6 W/m	24 V	CRI 80+	3000K	1159 Lm/m	121 Lm/W	7.5 m
AP-50-10-N5-835-IP	9.6 W/m	24 V	CRI 80+	3500K	1185 Lm/m	123 Lm/W	7.5 m
AP-50-10-N5-840-IP	9.6 W/m	24 V	CRI 80+	4000K	1188 Lm/m	124 Lm/W	7.5 m
AP-50-10-N5-850-IP	9.6 W/m	24 V	CRI 80+	5000K	1234 Lm/m	129 Lm/W	7.5 m
AP-50-10-N5-857-IP	9.6 W/m	24 V	CRI 80+	5700K	1191 Lm/m	124 Lm/W	7.5 m
AP-50-10-N5-865-IP	9.6 W/m	24 V	CRI 80+	6500K	1191 Lm/m	124 Lm/W	7.5 m
AP-50-10-N5-920-IP	9.6 W/m	24 V	CRI 90+	2000K	658 Lm/m	69 Lm/W	7.5 m
AP-50-10-N5-922-IP	9.6 W/m	24 V	CRI 90+	2200K	712 Lm/m	74 Lm/W	7.5 m
AP-50-10-N5-925-IP	9.6 W/m	24 V	CRI 90+	2500K	772 Lm/m	80 Lm/W	7.5 m
AP-50-10-N5-927-IP	9.6 W/m	24 V	CRI 90+	2700K	945 Lm/m	98 Lm/W	7.5 m
AP-50-10-N5-930-IP	9.6 W/m	24 V	CRI 90+	3000K	971 Lm/m	101 Lm/W	7.5 m
AP-50-10-N5-935-IP	9.6 W/m	24 V	CRI 90+	3500K	995 Lm/m	104 Lm/W	7.5 m
AP-50-10-N5-940-IP	9.6 W/m	24 V	CRI 90+	4000K	1005 Lm/m	105 Lm/W	7.5 m
AP-50-10-N5-950-IP	9.6 W/m	24 V	CRI 90+	5000K	1064 Lm/m	111 Lm/W	7.5 m
AP-50-10-N5-957-IP	9.6 W/m	24 V	CRI 90+	5700K	1057 Lm/m	110 Lm/W	7.5 m
AP-50-10-N5-965-IP	9.6 W/m	24 V	CRI 90+	6500K	1050 Lm/m	109 Lm/W	7.5 m
AP-50-10-N5-027-IP	9.6 W/m	24 V	CRI 95+	2700K	764 Lm/m	80 Lm/W	7.5 m
AP-50-10-N5-030-IP	9.6 W/m	24 V	CRI 95+	3000K	781 Lm/m	81 Lm/W	7.5 m
AP-50-10-N5-035-IP	9.6 W/m	24 V	CRI 95+	3500K	798 Lm/m	83 Lm/W	7.5 m
AP-50-10-N5-040-IP	9.6 W/m	24 V	CRI 95+	4000K	807 Lm/m	84 Lm/W	7.5 m
AP-50-10-N5-050-IP	9.6 W/m	24 V	CRI 95+	5000K	868 Lm/m	90 Lm/W	7.5 m