

## ARCHITAPE PRO 50-10 FLEXIBLE LED STRIP


V.ARCHITAPEPRO5010.01

### APPLICATION

- General LED Lighting
- Cove LED Lighting
- Linear LED lighting
- Backlighting
- Signage and Advertising
- Furniture Lighting & More

### PRODUCT FEATURES

- Japanese NICHIA LED Chips
- Single Bin (1/16<sup>th</sup>) LED or 3 Step MacAdam
- Stabilized Current Design
- Efficiency up to 164
- Thick Copper PCB
- 56 LEDs Per Metre
- High CRI80+, CRI90+ or CRI98+
- 7.5mm Width
- 24V DC Input
- Reverse Voltage Protection
- Thermal Conductive Adhesive Taa
- 120° Beam Angle
- 125mm Cut Points
- Dimmable

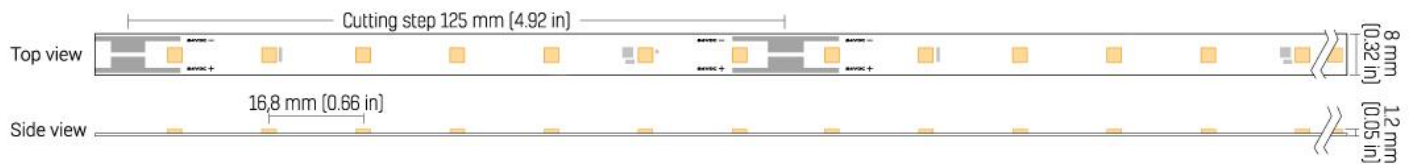

## TECHNICAL DETAILS

	LED QUANTITY	WATTAGE	LED BRAND	COLOR	CRI	LUMIN/M	EFFICACY	MAX.	CUTTING
<b>ARCHITAPE PRO 50/10/820</b>	56 LED/M	9.6 W/M	Nichia 757	2000K	80+	1003 lm/m	104 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/822</b>	56 LED/M	9.6 W/M	Nichia 757	2200K	80+	1084 lm/m	113 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/825</b>	56 LED/M	9.6 W/M	Nichia 757	2500K	80+	1204 lm/m	125 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/827</b>	56 LED/M	9.6 W/M	Nichia 757	2700K	80+	1413 lm/m	147 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/830</b>	56 LED/M	9.6 W/M	Nichia 757	3000K	80+	1456 lm/m	152 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/835</b>	56 LED/M	9.6 W/M	Nichia 757	3500K	80+	1464 lm/m	153 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/840</b>	56 LED/M	9.6 W/M	Nichia 757	4000K	80+	1464 lm/m	153 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/850</b>	56 LED/M	9.6 W/M	Nichia 757	5000K	80+	1573 lm/m	164 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/857</b>	56 LED/M	9.6 W/M	Nichia 757	5700K	80+	1500 lm/m	156 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/865</b>	56 LED/M	9.6 W/M	Nichia 757	6500K	80+	1500 lm/m	156 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/920</b>	56 LED/M	9.6 W/M	Nichia 757	2000K	90+	842 lm/m	88 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/922</b>	56 LED/M	9.6 W/M	Nichia 757	2200K	90+	911 lm/m	95 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/925</b>	56 LED/M	9.6 W/M	Nichia 757	2500K	90+	988 lm/m	103 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/927</b>	56 LED/M	9.6 W/M	Nichia 757	2700K	90+	1182 lm/m	123 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/930</b>	56 LED/M	9.6 W/M	Nichia 757	3000K	90+	1211 lm/m	126 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/935</b>	56 LED/M	9.6 W/M	Nichia 757	3500K	90+	1241 lm/m	129 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/940</b>	56 LED/M	9.6 W/M	Nichia 757	4000K	90+	1254 lm/m	131 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/950</b>	56 LED/M	9.6 W/M	Nichia 757	5000K	90+	1326 lm/m	138 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/957</b>	56 LED/M	9.6 W/M	Nichia 757	5700K	90+	1317 lm/m	137 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/965</b>	56 LED/M	9.6 W/M	Nichia 757	6500K	90+	1309 lm/m	136 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/027</b>	56 LED/M	9.6 W/M	Nichia 757	2700K	98+	977 lm/m	102 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/030</b>	56 LED/M	9.6 W/M	Nichia 757	3000K	98+	998 lm/m	104 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/035</b>	56 LED/M	9.6 W/M	Nichia 757	3500K	98+	1020 lm/m	106 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/040</b>	56 LED/M	9.6 W/M	Nichia 757	4000K	98+	1032 lm/m	108 Lm/W	5 M	125 mm
<b>ARCHITAPE PRO 50/10/050</b>	56 LED/M	9.6 W/M	Nichia 757	5000K	98+	1115 lm/m	116 Lm/W	5 M	125 mm